


Activating QUADDOA® Optical CAD Cloud License

1. Download the **Full version** of **QUADDOA® Optical CAD** (Important: Make sure to download the QUADDOA® full version and not the 45 Days Free Trial) from the QUADDOA® website under <https://quadoa.com/download>
2. **Install** the full version of QUADDOA® Optical CAD on your personal computer by following the installation wizard.

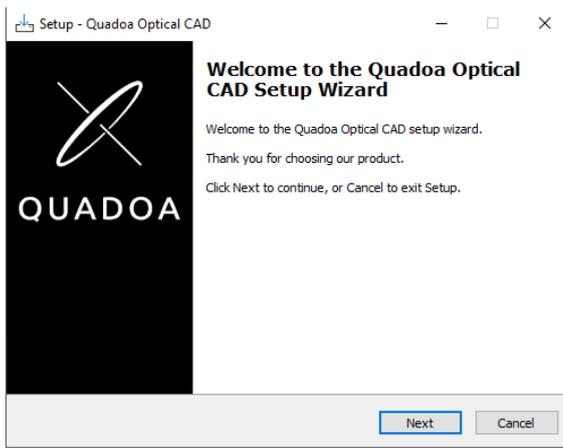

3. Open the **Sentinel Admin Control Center** using the address in your web browser <http://localhost:1947/>

The Sentinel Admin Control Center will launch

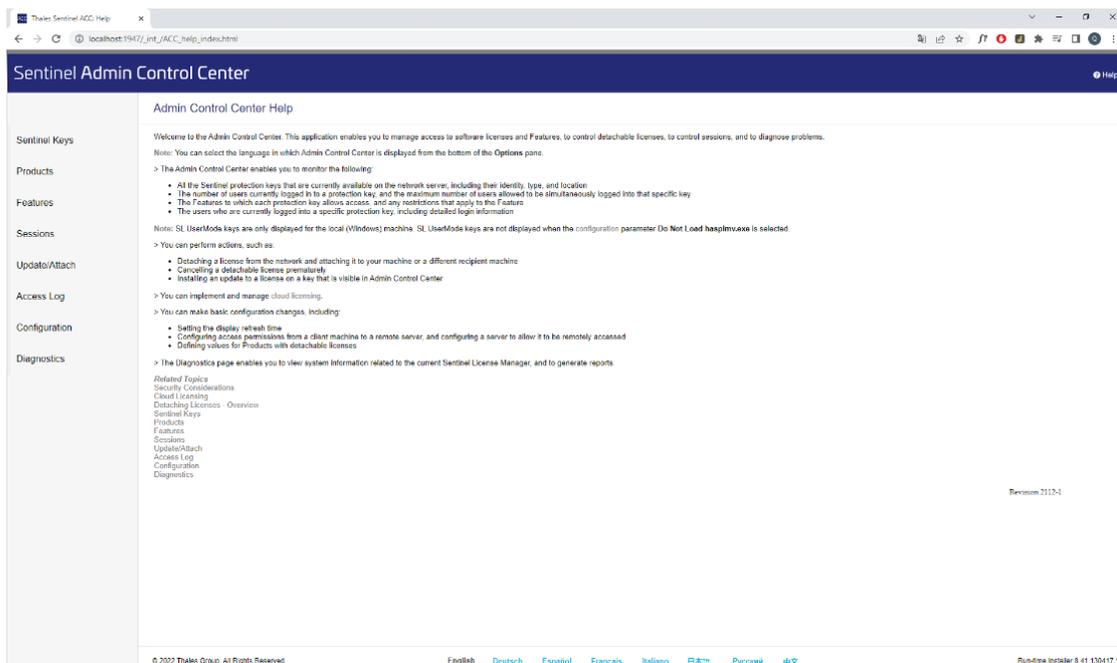


Figure 1: Admin Control Center (ACC)

4. Switch to **Configuration** and go to the **Access to Remote License Managers** Tab.
5. Check the **Allow Access to Remote Licenses** checkbox
6. Insert the **QUADOA® license key** which was sent to you by QUADOA®.

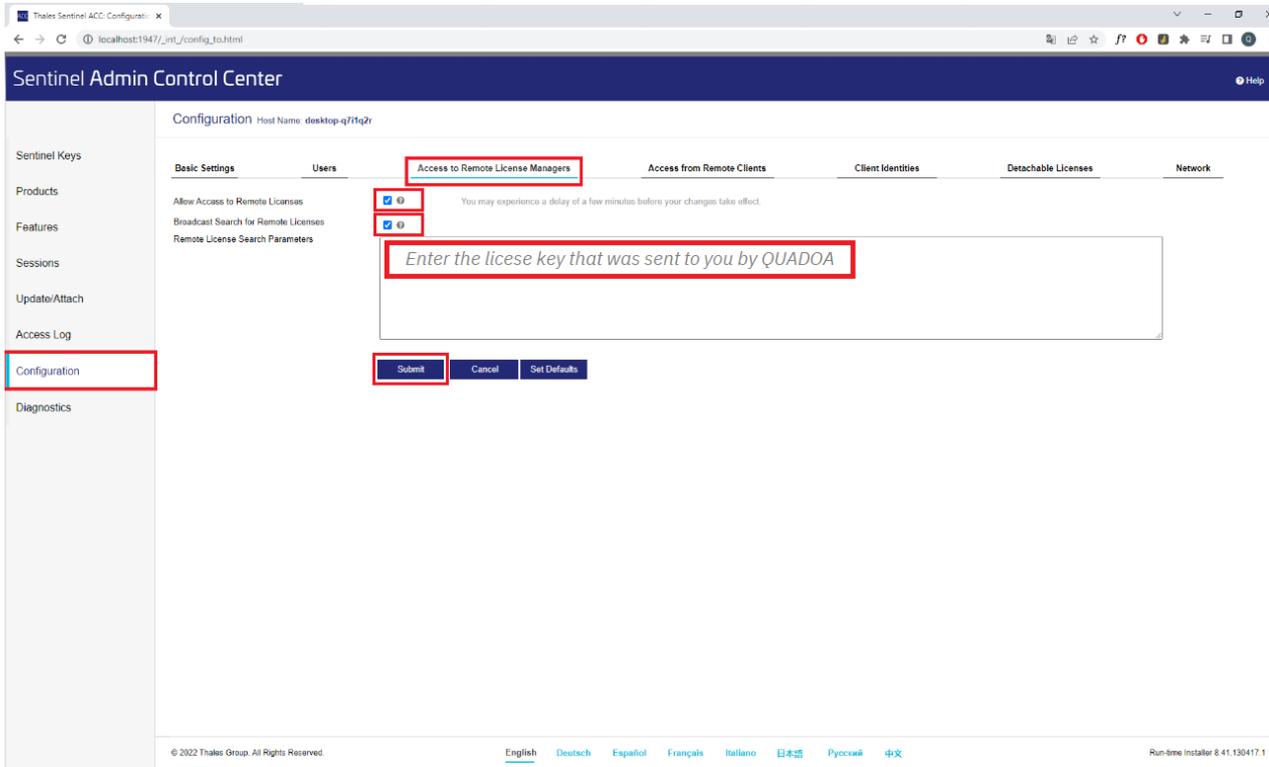


Figure 2: Admin Control Center (ACC)

7. Click on **Submit**
8. **Important:** The Sentinel LDK communicates via TCP and UDP on port 80 and/or 1947. The socket 1947 is IANA-registered exclusively for this purpose. It is required that you open either port 80 and/or 1947 in your network settings. It is therefore required that your network and the firewall settings **do not block port 80 and/or 1947. Set port 80 and/or 1947 to open in your router's settings.**
9. Your cloud license will be activated within few seconds. Afterwards you should have access to QUADOA® Optical CAD. An internet connection is required at all times.

Multiple Machines: You can activate the same license key on multiple personal devices, such as your office workstation and home computer. Just follow the steps in this guide for each device. However, keep in mind that the license can only be used on one computer at a time.

Privacy Data Information: All personal data is stored on your personal computer. Only the QUADOA® license key is stored on the cloud server.