


STEP A: Creating Customer to Vendor File (*.C2V) for sending License information to QUADDOA®

General Information:

For Hardware License with USB-Dongle: Connect the USB Protection License Dongle to a computer on which QUADDOA® is installed and for which you want an update.

For Soft Licenses: The following steps must be performed on the computer or server where the QUADDOA® license is installed.

1. Open the **Sentinel Admin Control Center** (ACC) by typing in the browser <http://localhost:1947/>
2. In the **Sentinel Keys Tab** search for the **Vendor ID 91313** and your personal QUADDOA® **Key ID**. There on the very right side click on **C2V**, to generate the C2V-file.



Location	Vendor	Key ID	Key Type	Configuration	Version	Sessions	Actions
Local	91313 (91313)	16408445	Sentinel HL Pro	Driverless	6.07		Products Features Sessions Blink on C2V

3. **Send the C2V file to a QUADDOA®** representative to update your QUADDOA® license.
4. **Wait for the update-file** that you will get from QUADDOA®. Once you received the update file, **continue with STEP B** on the next page for updating your license.

➔ **Continue on next page with STEP B to run update file**


STEP B: Importing Vendor to Customer file (*.V2C) to update the QUADDOA® License on end user's machine

General Information:

For Hardware License with USB-Dongle: Connect the same USB Protection License Dongle as in STEP A to a computer on which QUADDOA® is installed and for which you want an update.

For Soft Licenses: The following steps must be performed on the same computer or server as in STEP A.

5. Open the **Sentinel Admin Control Center** (ACC) by typing in the browser <http://localhost:1947/>
6. In the ACC click on the **Update/Attach** tab and select the **Update-V2C-File** which was sent to you by QUADDOA®.

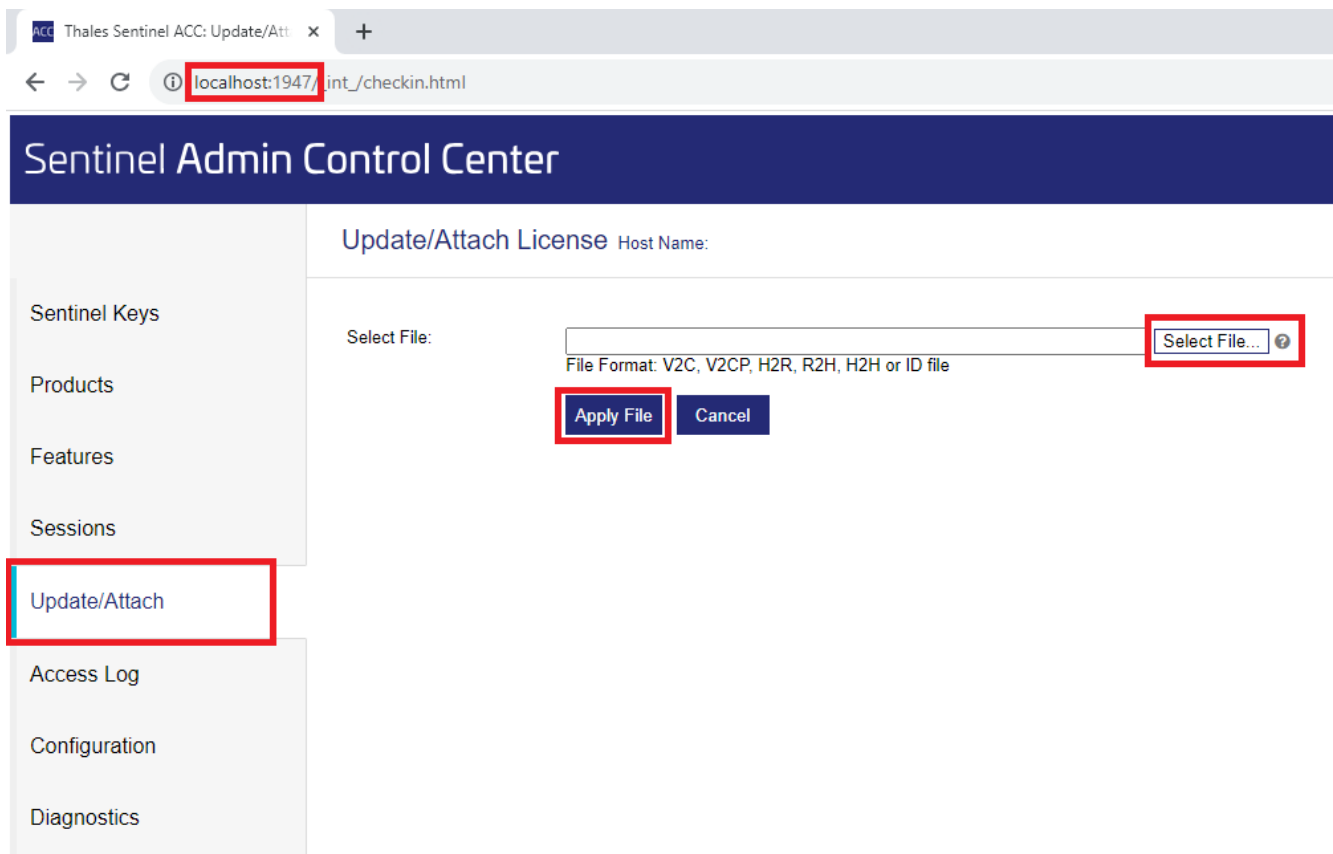

7. Click on **Apply File**, to update the end user's machine with the QUADDOA® license. A message will show up, that the update of the QUADDOA® license was successful.